

KREA



HIGH DEFINITION TEXTURE



EASY TO REPAIR



ANTIBACTERIAL



EASY TO TRANSPORT



NON-SLIP CLASS B



IMPACT RESISTANT



QUALITY RAW MATERIAL



FAST DELIVERY



CUSTOM-MADE



WATERPROOF



PROCESS CONTROL



EASY TO CUT




EASY TO CLEAN



EASY TO INSTALLATION



PRODUCT COMPLIES WITH EUROPEAN NORMS



TECHNICAL DATA:

Material: Polyester resin and the latest mineral loads

Cover: Highly resistant, durable non-slip Gel Coat

Texture: Natural slate, antislip Class B


Surface: Satin finish

Outflow: Horizontal valve Ø 9,2

Installation type: Floor, Feet

Gross weight: Approx. 30 Kg/m² (D25)
Approx. 36 Kg/m² (D30)

TEXTURE:

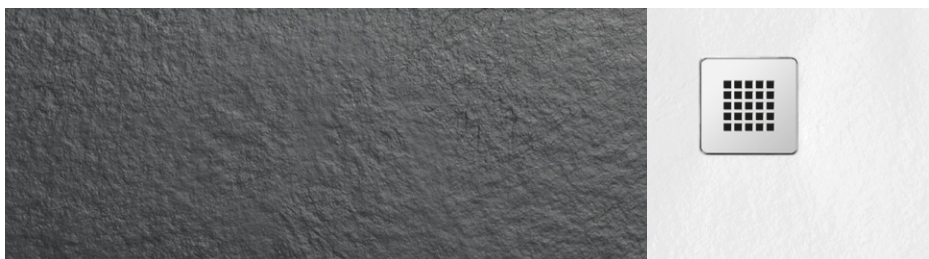

STANDARD COLORS:

WHITE
RAL 9003



BEIGE
RAL 9001



MOKA
RAL 1001



PEARL GREY
RAL 7035



GREY
RAL 7037



GRAPHITE
RAL 7016



ACCESSORIES:




STAINLESS STEEL GRID INCLUDED IN ALL THE KREA SERIES



HORIZONTAL SIPHON VALVE FOR KREA SERIES

DRAWING:

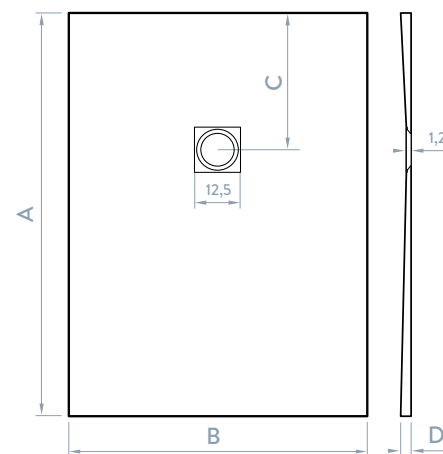

B 70 / 75 / 80		
A	C	D
80	Central	2,5
80x80	Central	2,5
90	30	2,5
100	30	2,5
110	30	2,5
120	35	2,5
130	35	2,7
140	40	2,7
150	40	2,9
160	45	2,9
170	45	2,9
180	50	2,9
190	50	3,0
200	50	3,0
220	Central	3,0
240	Central	3,0


B 90 / 100		
A	C	D
90x90	Central	3,0
100x90	30	3,0
100x100	Central	3,0
120	35	3,0
140	40	3,0
150	40	3,0
160	45	3,0
170	45	3,0
180	50	3,0
190	50	3,0
200	50	3,0
220	Central	3,0
240x100	Central	3,0

B 120		
A	C	D
110	Central	3,0
120	Central	3,0
130	Central	3,0
140	Central	3,0
150	Central	3,0
160	Central	3,0
170	Central	3,0
180	Central	3,0
190	Central	3,0
200	Central	3,0
220	Central	3,0

Dimensions expressed in centimeters

KREA

SIZES:

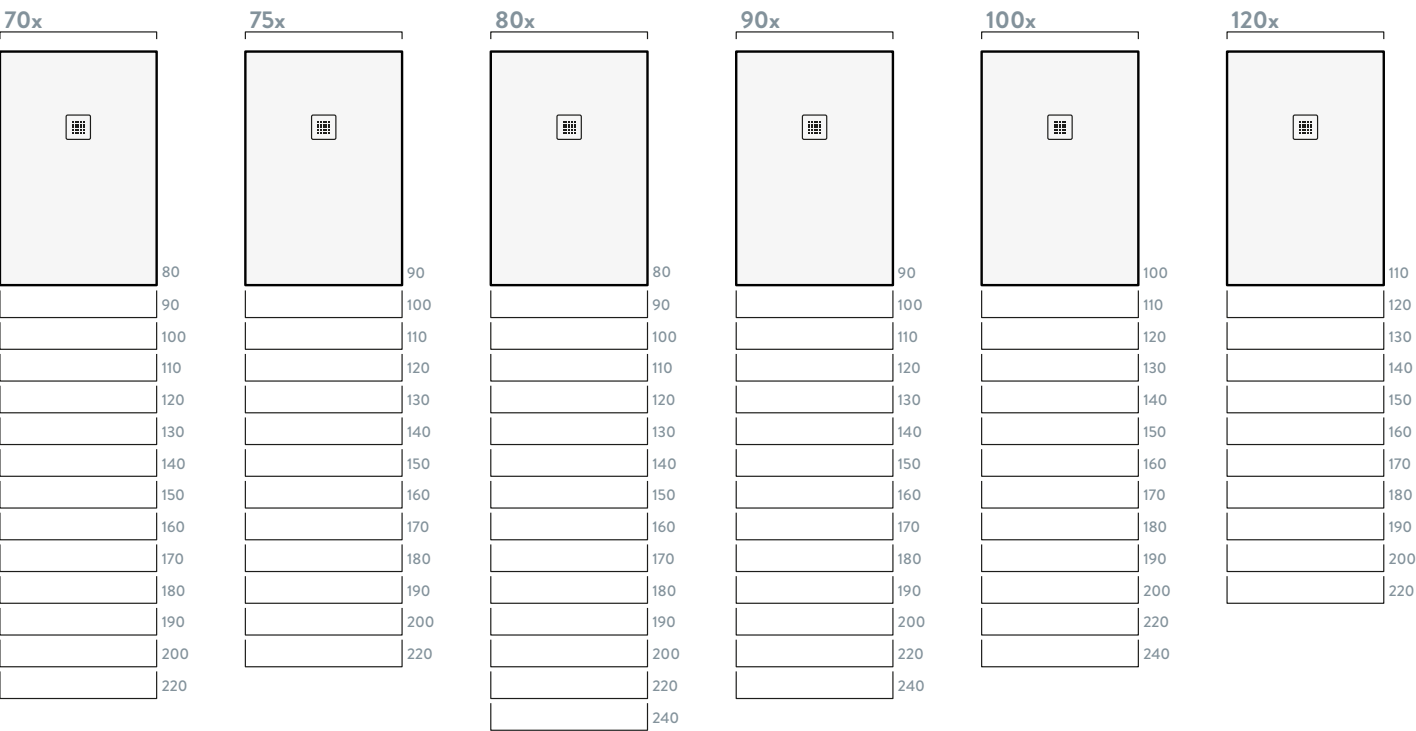

Dimensions expressed in centimeters

TOLERANCE:

Lenght and width tolerance		+5/0	mm
Height tolerance		+2/-2	mm
Bending tolerance	<1200 mm	+2/-2	mm
	≥1200 mm	+3/-3	mm
Hole location tolerance		+2/-2	mm
Holes diameter tolerance		+2/-2	mm

